


Mx|66| Center Load Test

The Modulus-X™ method delivers the best weight-to-strength ratios, highest load ratings and durability in the industry.

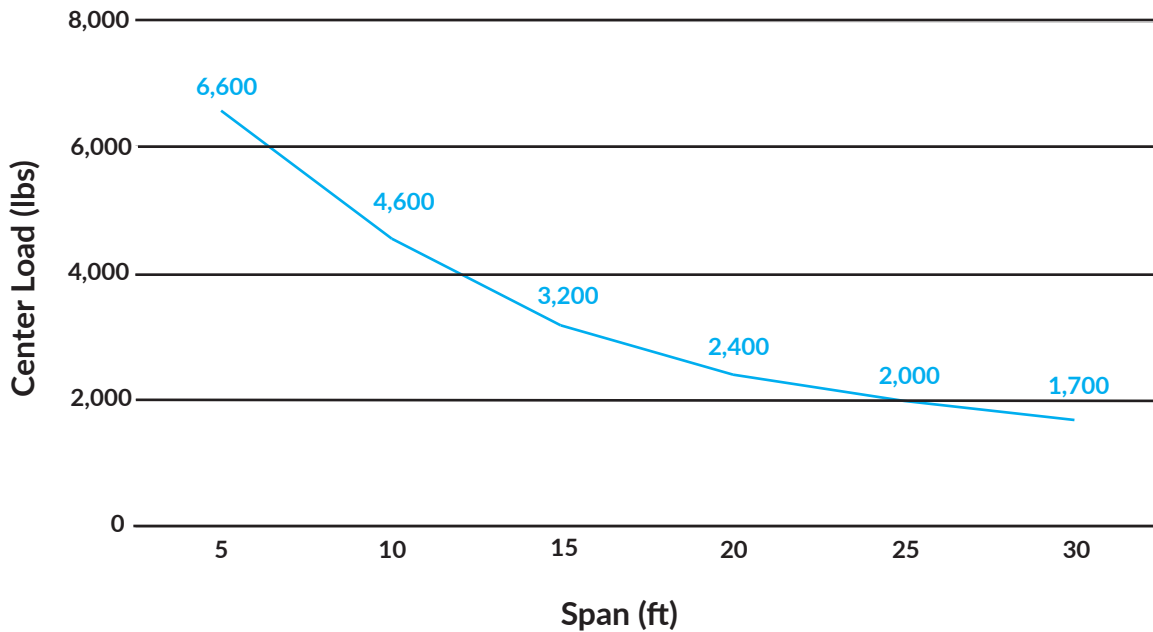

Mx 66 0.25 thick 1/4 Rad	
Type C Calculated	
Material	6061
Yield (PSI)	40,000
Ultimate Tensile	45,000
Mass per FT	4.25 lbs
Brinell Hardness	95

Span (ft)	Mx 66 Uniform/Center Load (lbs)	Deflection (inch)
5	6,600	0.14
10	4,600	0.56
15	3,200	1.28
20	2,400	2.24
25	2,000	3.64
30	1,700	5.34

Mx|66| Weights

6"	1'	2'	3'	4'	5'	6'	7'	8'	9'	10'
4 lbs	6 lbs	10 lbs	14 lbs	18 lbs	22 lbs	26 lbs	30 lbs	34 lbs	38 lbs	42 lbs